




### Description

RGBW/RGBA Colour Changer Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system. RGBW (white in 4000 K, 3000 K available on request) and RGBA.

IP66, Class III. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request.

Glass LED lens array. Factory installed LED circuit board. Electronic control gear in separate gearbox (medium), prewired. Colour Boost Technology. DMX interface.

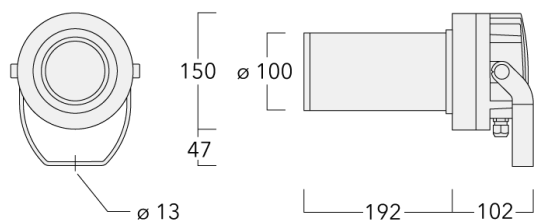

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK05			

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[ZP] symmetric Zoom-Projector

4000K+RGBW

15 W

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2484	LED-1/15W/4000K+RGBW	381.2 lm	15 W	80
	139-2484	LED-1/15W/4000K+RGBW	572.1 lm	15 W	80
	139-2485	LED-1/15W/RGBA	352.6 lm	15 W	80
	139-2485	LED-1/15W/RGBA	529.2 lm	15 W	80