






#### Description

RGBW/RGBA Colour Changer. IP66, Class III. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Electronic control gear in separate gear box (constant current), prewired. Gearbox to be ordered separately. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board, Colour Boost Technology. DMX interface.

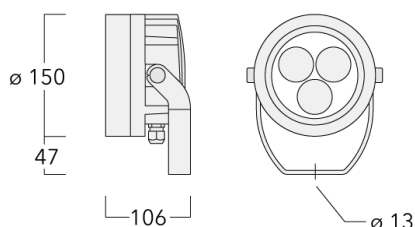

## Specifications

### Material description

Colours	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	<b>RAL7016</b>
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	<b>RAL9016</b>			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DMX
Surge protection	SP10 (separate driver box - large)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

## Options

### Light distribution

### Colour temperature

### Nominal Watt



[B] symmetric, wide beam

4000K+RGBW



12 W



[M] symmetric, medium beam

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2408	LED-3/12W/4000K+RGBW	889.2 lm	12 W	80
	139-2410	LED-3/12W/RGBA	783.2 lm	12 W	80
[B] symmetric, wide beam					
	139-2411	LED-3/12W/4000K+RGBW	898.4 lm	12 W	80
	139-2413	LED-3/12W/RGBA	791.4 lm	12 W	80
[M] symmetric, medium beam					