

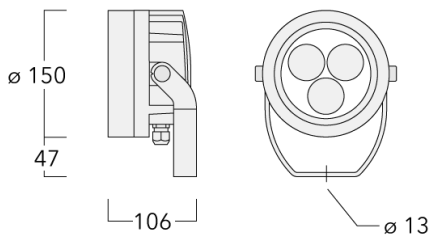




Description

RGBW/RGBA Color Changer.

IP66, Class III. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Integral driver in separate driver box (constant current), prewired; to be ordered separately. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board. Color Changer technology. DMX interface.



Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX - 9004 (Black)
+ XXX-XXXX (Accessory 1)

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK07			



Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DMX
Surge protection	SP10 (separate driver box - large)
Energy efficiency	G (Light source)



Additional information

Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.
Lifetime	Ta=25° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 [W] bi-symmetric, wide beam	RGBW	12 W
 [M] symmetric, medium beam	RGBA	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
	139-2413_us	LED-3/12W/RGBA	791.4 lm	12 W	80
	139-2411_us	LED-3/12W/RGBW	898.4 lm	12 W	80
[M] symmetric, medium beam					
	139-2410_us	LED-3/12W/RGBA	783.2 lm	12 W	80
	139-2408_us	LED-3/12W/RGBW	889.2 lm	12 W	80
[W] bi-symmetric, wide beam					