




Description

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

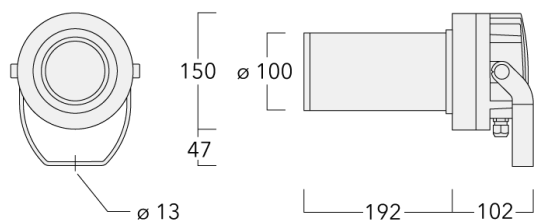

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Glass LED lens array. Factory installed LED circuit board. Integral electronic control gear, thermally separated.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK05			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV (optional SP10, only for ON/OFF)
Energy efficiency	F (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution



[FP] symmetric Framing-Projector

Colour temperature



2700K



3000K




4000K

Nominal Watt

18 W

26 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP] symmetric Framing-Projector</p>	139-2504	LED-1/18W/2700K	1190.3 lm	18 W	80
	139-2504	LED-1/18W/2700K	1286.6 lm	18 W	80
	139-2475	LED-1/18W/3000K	1231.4 lm	18 W	80
	139-2475	LED-1/18W/3000K	1330.9 lm	18 W	80
	139-2476	LED-1/18W/4000K	1298.1 lm	18 W	80
	139-2476	LED-1/18W/4000K	1403 lm	18 W	80
	139-2507	LED-1/26W/2700K	1636.7 lm	26 W	80
	139-2507	LED-1/26W/2700K	1769 lm	26 W	80
	139-2481	LED-1/26W/3000K	1690.6 lm	26 W	80
	139-2481	LED-1/26W/3000K	1827.3 lm	26 W	80
	139-2482	LED-1/26W/4000K	1780.3 lm	26 W	80
	139-2482	LED-1/26W/4000K	1924.3 lm	26 W	80