




Description

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

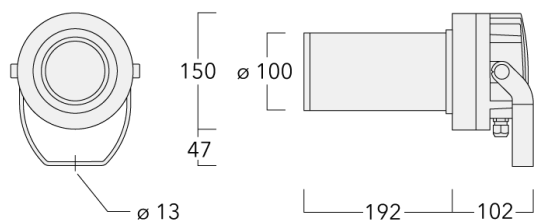

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Glass LED lens array. Factory installed LED circuit board. Integral electronic control gear, thermally separated.

Gobo outside diameter 46.6 mm, max. printable area $d = 38$ mm.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK05			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV (optional SP10, only for ON/OFF)
Energy efficiency	F (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution



[GP] symmetric Gobo-Projector

Colour temperature

Nominal Watt



2700K

18 W

26 W




3000K



4000K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP] symmetric Gobo-Projector</p>	139-2503	LED-1/18W/2700K	778.3 lm	18 W	80
	139-2503	LED-1/18W/2700K	812.4 lm	18 W	80
	139-2498	LED-1/18W/3000K	805.1 lm	18 W	80
	139-2498	LED-1/18W/3000K	840.4 lm	18 W	80
	139-2499	LED-1/18W/4000K	848.7 lm	18 W	80
	139-2499	LED-1/18W/4000K	885.9 lm	18 W	80
	139-2506	LED-1/26W/2700K	1070.1 lm	26 W	80
	139-2506	LED-1/26W/2700K	1117 lm	26 W	80
	139-2479	LED-1/26W/3000K	1105.4 lm	26 W	80
	139-2479	LED-1/26W/3000K	1153.8 lm	26 W	80
	139-2480	LED-1/26W/4000K	1164.1 lm	26 W	80
	139-2480	LED-1/26W/4000K	1215.1 lm	26 W	80