




**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately.

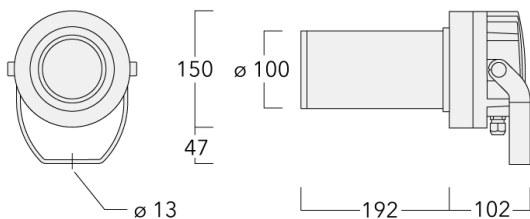

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Glass LED lens array. Factory installed LED circuit board. Integral electronic control gear, thermally separated.

Gobo outside diameter 46.6 mm, max. printable area d = 38 mm.

## Specifications

### Material description

|                    |                                |                                   |                                  |
|--------------------|--------------------------------|-----------------------------------|----------------------------------|
| Colours            | <b>RAL9004</b><br>Signal black | <b>RAL9006</b><br>White aluminium | <b>RAL9007</b><br>Grey aluminium |
| Ingress protection | IP66                           |                                   |                                  |
| Impact resistance  | IK05                           |                                   |                                  |

### Electrical description

|                   |   |
|-------------------|---|
| Power supply      | 220-240V / 50-60 Hz   |
| Driver / Ballast  | Standard. Optional DALI version available. To be specified at time of ordering. |
| Surge protection  | 6/6 kV (optional SP10, only for ON/OFF)   |
| Energy efficiency | F (Light source)  |

### Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=40° L70B50 > 50000h |
|----------|------------------------|

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




2700K

18 W

26 W




3000K



4000K

## Configurations

| Light distribution  | Part ID  | Light source    | Rated lumens | Rated input power | CRI |
|---|----------|-----------------|--------------|-------------------|-----|
|  <p>[GP]</p> | 139-2503 | LED-1/18W/2700K | 778.3 lm     | 18 W              | 80  |
|   | 139-2503 | LED-1/18W/2700K | 812.4 lm     | 18 W              | 80  |
|   | 139-2498 | LED-1/18W/3000K | 805.1 lm     | 18 W              | 80  |
|   | 139-2498 | LED-1/18W/3000K | 840.4 lm     | 18 W              | 80  |
|   | 139-2499 | LED-1/18W/4000K | 848.7 lm     | 18 W              | 80  |
|   | 139-2499 | LED-1/18W/4000K | 885.9 lm     | 18 W              | 80  |
|   | 139-2506 | LED-1/26W/2700K | 1070.1 lm    | 26 W              | 80  |
|   | 139-2506 | LED-1/26W/2700K | 1117 lm      | 26 W              | 80  |
|   | 139-2479 | LED-1/26W/3000K | 1105.4 lm    | 26 W              | 80  |
|   | 139-2479 | LED-1/26W/3000K | 1153.8 lm    | 26 W              | 80  |
|   | 139-2480 | LED-1/26W/4000K | 1164.1 lm    | 26 W              | 80  |
|   | 139-2480 | LED-1/26W/4000K | 1215.1 lm    | 26 W              | 80  |