




### Description

Tunable white projector. Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system. Tunable White Technology.

IP66, Class III. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Factory installed LED circuit board.

Integral EC electronic converter in thermally-separated compartment. Glass LED lens array. DALI interface.

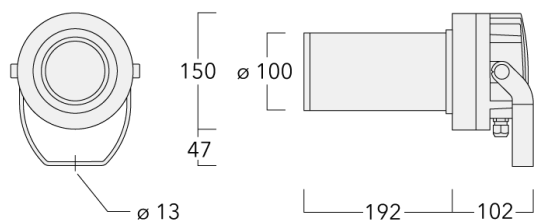

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK05			

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	E (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[FP] symmetric Framing-Projector

2200-6000K

10 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2494	LED-1/10W/2200-6000K	343.1 lm	10 W	80
	139-2494	LED-1/10W/2200-6000K	514.9 lm	10 W	80

[FP] symmetric Framing-Projector