




Description

Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system. Tunable White Technology.

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Factory installed LED circuit board. Integral EC electronic converter in thermally-separated compartment. Glass LED lens array. DALI interface.

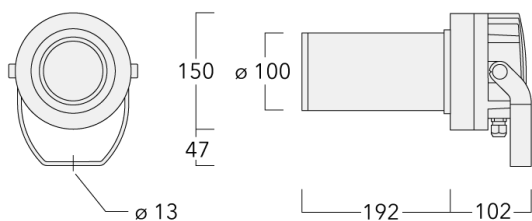

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Ingress protection	IP66		
Impact resistance	IK05		

Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	E (Light source)

Additional information

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

Options


Light distribution **Colour temperature** **Nominal Watt**



2200-6000K

10 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [FP]	139-2494	LED-1/10W/2200-6000K	343.1 lm	10 W	80
	139-2494	LED-1/10W/2200-6000K	514.9 lm	10 W	80