






Description

Tunable White. IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Integral EC electronic converter in thermally-separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board, Tunable White Technology. DALI interface.

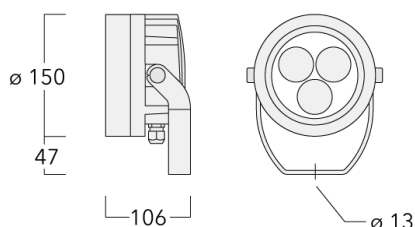

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Surge protection	6/6 kV (optional SP10)
Energy efficiency	E (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options**Light distribution****Colour temperature****Nominal Watt**

[B] symmetric, wide beam

2200-6000K

11 W






[M] symmetric, medium beam



[E] symmetric, narrow beam

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[B] symmetric, wide beam</p>	139-2417	LED-3/11W/2200-6000K	953.5 lm	11 W	80
 <p>[E] symmetric, narrow beam</p>	139-2419	LED-3/11W/2200-6000K	980.7 lm	11 W	80
 <p>[M] symmetric, medium beam</p>	139-2418	LED-3/11W/2200-6000K	963.4 lm	11 W	80