






Description

Tunable white projector. IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG[®] Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request.

Integral EC electronic converter in thermally-separated compartment. CAD-optimised optics for superior illumination and glare control. OLC[®] One LED Concept. Factory-installed LED circuit board with Tunable White Technology.

DALI interface. For other control interface options to suit specific project requirements, contact WE-EF.

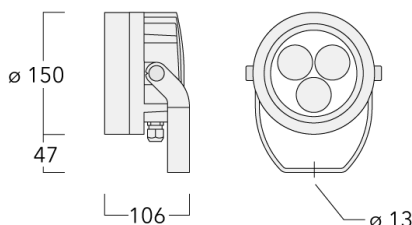

Specifications

Material description

Colours	RAL9004 Signal black	RAL9007 Grey aluminium	RAL7016 Anthracite grey	RAL9016 Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Surge protection	6/6 kV (optional SP10)
Energy efficiency	E (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options

Light distribution

Colour temperature

Nominal Watt



[B] symmetric, wide beam

2200-6000K

11 W






[M] symmetric, medium beam



[E] symmetric, narrow beam

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[B] symmetric, wide beam</p>	139-2417	LED-3/11W/2200-6000K	953.5 lm	11 W	80
 <p>[E] symmetric, narrow beam</p>	139-2419	LED-3/11W/2200-6000K	980.7 lm	11 W	80
 <p>[M] symmetric, medium beam</p>	139-2418	LED-3/11W/2200-6000K	963.4 lm	11 W	80