






### Description

Tunable White. IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Integral EC electronic converter in thermally-separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board, Tunable White Technology. DALI interface.

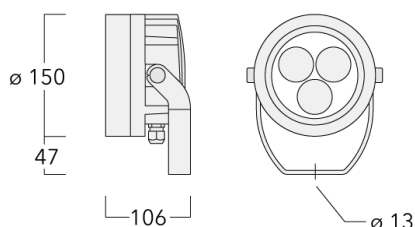

## Specifications

### Material description

Colours	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	<b>RAL7016</b>
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	<b>RAL9016</b>			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Surge protection	6/6 kV (optional SP10)
Energy efficiency	E (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options****Light distribution    Colour temperature    Nominal Watt**

[B]

2200-6000K

11 W






[M]



[E]

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[B]</p>	139-2417	LED-3/11W/2200-6000K	953.5 lm	11 W	80
 <p>[E]</p>	139-2419	LED-3/11W/2200-6000K	980.7 lm	11 W	80
 <p>[M]</p>	139-2418	LED-3/11W/2200-6000K	963.4 lm	11 W	80