






Description

Tunable White. IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through-wiring on request. Integral EC electronic converter in thermally-separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory-installed LED circuit board, Tunable White Technology. DALI interface.

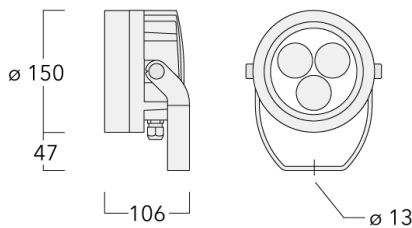

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	DALI
Surge protection	6/6 kV (optional SP10)
Energy efficiency	E (Light source)

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution	Colour temperature	Nominal Watt
--------------------	--------------------	--------------



[B]

2200-6000K

11 W






[M]



[E]

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [B]	139-2417	LED-3/11W/2200-6000K	953.5 lm	11 W	80
 [E]	139-2419	LED-3/11W/2200-6000K	980.7 lm	11 W	80
 [M]	139-2418	LED-3/11W/2200-6000K	963.4 lm	11 W	80