




Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system. Tunable White Technology.

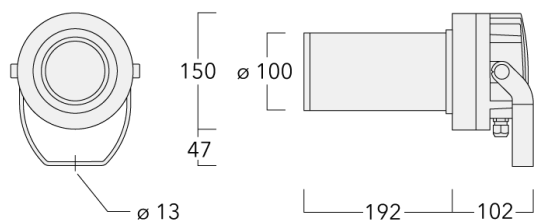

IP66, Class I. Class II on request. IK05. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter in thermally-separated compartment. Glass LED lens array. Factory installed LED circuit board. DALI interface.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK05			

Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	6/6 kV (optional SP10 in separate gearbox, large)
Energy efficiency	E (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options


Light distribution **Colour temperature** **Nominal Watt**



2200-6000K

10 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [ZP]	139-2492	LED-1/10W/2200-6000K	343.1 lm	10 W	80
	139-2492	LED-1/10W/2200-6000K	514.9 lm	10 W	80