






**Description**

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands. Second gland for through wiring.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

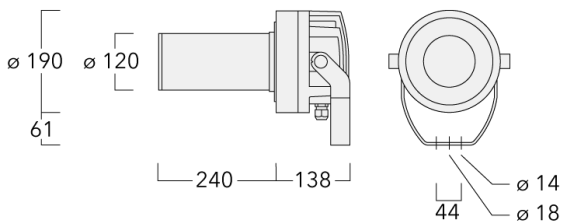

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10)
Energy efficiency	F (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**



[ZP] symmetric Zoom-Projector

**Colour temperature**


**Nominal Watt**



3000K

24 W

37 W




4000K



2700K

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2508	LED-1/24W/2700K	1541.9 lm	24 W	80
	139-2508	LED-1/24W/2700K	1783.1 lm	24 W	80
	139-2126	LED-1/24W/3000K	1587.7 lm	24 W	80
	139-2126	LED-1/24W/3000K	1836.1 lm	24 W	80
	139-2127	LED-1/24W/4000K	1656.4 lm	24 W	80
	139-2127	LED-1/24W/4000K	1915.6 lm	24 W	80
	139-2511	LED-1/37W/2700K	2091.7 lm	37 W	80
	139-2511	LED-1/37W/2700K	2419 lm	37 W	80
	139-2117	LED-1/37W/3000K	2153.6 lm	37 W	80
	139-2117	LED-1/37W/3000K	2490.6 lm	37 W	80
	139-2123	LED-1/37W/4000K	2245.2 lm	37 W	80
	139-2123	LED-1/37W/4000K	2596.6 lm	37 W	80