






Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated.

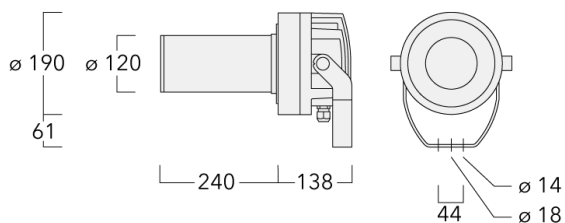

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	6/6 kV (optional SP10)
Energy efficiency	F (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------


Options

Light distribution Colour temperature Nominal Watt



	3000K	24 W 37 W
	4000K	
	2700K	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP]</p>	139-2508	LED-1/24W/2700K	1541.9 lm	24 W	80
	139-2508	LED-1/24W/2700K	1783.1 lm	24 W	80
	139-2126	LED-1/24W/3000K	1587.7 lm	24 W	80
	139-2126	LED-1/24W/3000K	1836.1 lm	24 W	80
	139-2127	LED-1/24W/4000K	1656.4 lm	24 W	80
	139-2127	LED-1/24W/4000K	1915.6 lm	24 W	80
	139-2511	LED-1/37W/2700K	2091.7 lm	37 W	80
	139-2511	LED-1/37W/2700K	2419 lm	37 W	80
	139-2117	LED-1/37W/3000K	2153.6 lm	37 W	80
	139-2117	LED-1/37W/3000K	2490.6 lm	37 W	80
	139-2123	LED-1/37W/4000K	2245.2 lm	37 W	80
	139-2123	LED-1/37W/4000K	2596.6 lm	37 W	80