






Description

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands. Second gland for through wiring.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output.

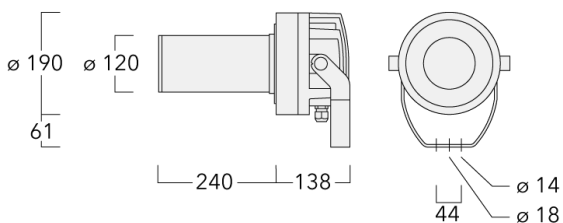

Specifications

Material description

Colours	RAL9004 Signal black	RAL9007 Grey aluminium	RAL7016 Anthracite grey	RAL9016 Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10)
Energy efficiency	F (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options


Light distribution **Colour temperature** **Nominal Watt**



3000K

24 W

37 W




4000K



2700K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP]</p>	139-2508	LED-1/24W/2700K	1541.9 lm	24 W	80
	139-2508	LED-1/24W/2700K	1783.1 lm	24 W	80
	139-2126	LED-1/24W/3000K	1587.7 lm	24 W	80
	139-2126	LED-1/24W/3000K	1836.1 lm	24 W	80
	139-2127	LED-1/24W/4000K	1656.4 lm	24 W	80
	139-2127	LED-1/24W/4000K	1915.6 lm	24 W	80
	139-2511	LED-1/37W/2700K	2091.7 lm	37 W	80
	139-2511	LED-1/37W/2700K	2419 lm	37 W	80
	139-2117	LED-1/37W/3000K	2153.6 lm	37 W	80
	139-2117	LED-1/37W/3000K	2490.6 lm	37 W	80
	139-2123	LED-1/37W/4000K	2245.2 lm	37 W	80
	139-2123	LED-1/37W/4000K	2596.6 lm	37 W	80