



Description

RGBW/RGBA Color Changer Profile Projector [GP] for projection of gobos on a surface.


Spherical and aspherical, double flat convex lens system. Aperture angle ranges from 14.8-22°.

Gobo size G. Gobo outside diameter 66 mm, max printable area d = 48 mm. WE-EF recommends d = 38 mm.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland, second gland for through wiring on request. PMMA LED lens array. Integral driver, thermally separated. Factory-installed circuit board. RGBW/RGBA. DMX interface.

For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1.5 + DMX".

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

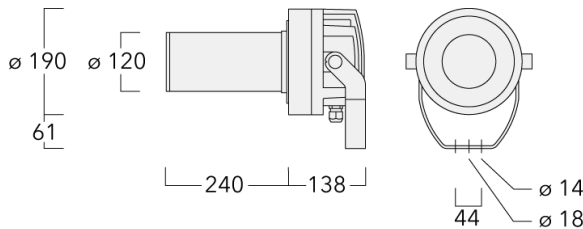

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK07			


Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V.
Driver / Ballast	Integral EC electronic converter with DMX Interface
Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)


Additional information

Diameter (inches)	7.48
Listings	Contact WE-EF USA for ETL/UL certification status.
Windage	0.503
Lifetime	Ta=25°/40° L70B50 > 50000h

Options

Light distribution	Color temperature	Nominal Watt
 [GP]	4000K+RGBW	24 W
	RGBA	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [GP]	139-2296	LED-1/24W/4000K+RGBW	298.7 lm	24 W	80
	139-2296	LED-1/24W/4000K+RGBW	763.2 lm	24 W	80
	139-2328	LED-1/24W/RGBA	281.5 lm	24 W	80
	139-2328	LED-1/24W/RGBA	719.2 lm	24 W	80