




Description

RGBW/RGBA Colour Changer Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system.

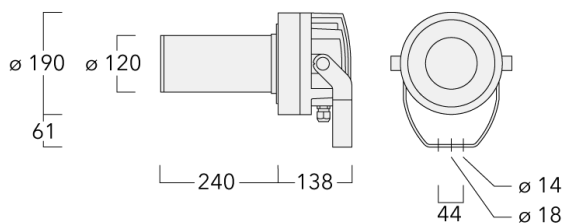

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter, thermally separated. PMMA LED lens array. Factory-installed RGBW/RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/ colours. DMX interface.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution

Colour temperature

Nominal Watt




[ZP] symmetric Zoom-Projector

4000K+RGBW

24 W

RGBA

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2295	LED-1/24W/4000K+RGBW	490.1 lm	24 W	80
	139-2295	LED-1/24W/4000K+RGBW	763.2 lm	24 W	80
	139-2327	LED-1/24W/RGBA	719.2 lm	24 W	80
	139-2327	LED-1/24W/RGBA	461.8 lm	24 W	80