






Description

Profile Projector [FP] for framing applications, polygon shape. Spherical/double flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands for improved wiring flexibility. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated.

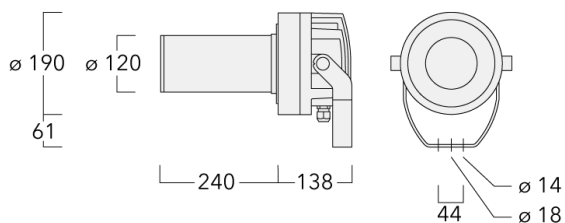

Specifications

Material description

| | | | |
|----------------------|---|-----------------------------------|----------------------------------|
| Colours | RAL9004 Signal black | RAL9006 White aluminium | RAL9007 Grey aluminium |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) | | |
| Ingress protection | IP66 | | |
| Impact resistance | IK07 | | |
| Corrosion resistance | 5CE+Primer | | |

Electrical description

| | |
|-------------------|--|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering. |
| Surge protection | 6/6 kV (optional SP10) |
| Energy efficiency | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=40° L70B50 > 50000h |
|----------|------------------------|

Options

Light distribution



[FP] symmetric Framing-Projector

Colour temperature



3000K



4000K




2700K

Nominal Watt

24 W

37 W

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI |
|---|----------|-----------------|--------------|-------------------|-----|
|  <p>[FP] symmetric Framing-Projector</p> | 139-2510 | LED-1/24W/2700K | 1541.9 lm | 24 W | 80 |
| | 139-2510 | LED-1/24W/2700K | 1783.1 lm | 24 W | 80 |
| | 139-2130 | LED-1/24W/3000K | 1587.7 lm | 24 W | 80 |
| | 139-2130 | LED-1/24W/3000K | 1836.1 lm | 24 W | 80 |
| | 139-2131 | LED-1/24W/4000K | 1656.4 lm | 24 W | 80 |
| | 139-2131 | LED-1/24W/4000K | 1915.6 lm | 24 W | 80 |
| | 139-2513 | LED-1/37W/2700K | 2091.7 lm | 37 W | 80 |
| | 139-2513 | LED-1/37W/2700K | 2419 lm | 37 W | 80 |
| | 139-2118 | LED-1/37W/3000K | 2153.6 lm | 37 W | 80 |
| | 139-2118 | LED-1/37W/3000K | 2490.6 lm | 37 W | 80 |
| | 139-2125 | LED-1/37W/4000K | 2245.2 lm | 37 W | 80 |
| | 139-2125 | LED-1/37W/4000K | 2596.6 lm | 37 W | 80 |