




**Description**

Tunable white projector. Profile Projector [FP] for framing applications, polygon shape. Spherical and aspherical, double flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands.

Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. LED circuit board with Tunable White Technology.

DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

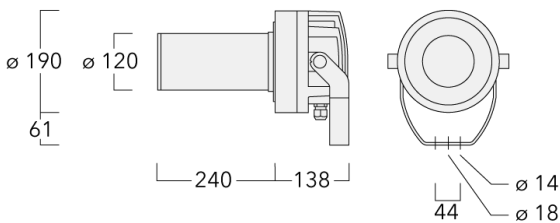

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9007</b> Grey aluminium	<b>RAL7016</b> Anthracite grey	<b>RAL9016</b> Traffic white
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	E (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[FP] symmetric Framing-Projector

2200-6000K

18 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2332	LED-1/18W/2200-6000K	441 lm	18 W	80
	139-2332	LED-1/18W/2200-6000K	686.9 lm	18 W	80

[FP] symmetric Framing-Projector