



**Description**


Tunable White Profile Projector [FP] for framing applications, polygon shape.

Spherical and aspherical, double flat convex lens system. Aperture angle ranges from 14.6-22°.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland, second gland for through wiring on request. PMMA LED lens array. Integral driver, thermally separated. Factory-installed LED circuit board. Tunable White technology. LED board can be removed for upgrading. DMX Interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

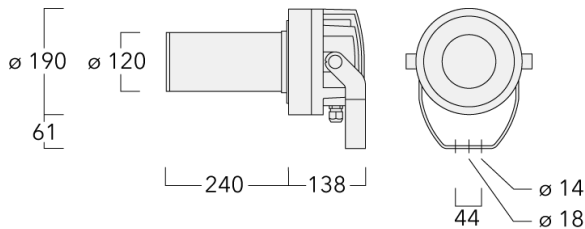

**Specifications**

**Material description**

|                    |                                |                                  |                                 |                              |
|--------------------|--------------------------------|----------------------------------|---------------------------------|------------------------------|
| Colors             | <b>RAL9004</b><br>Signal black | <b>RAL9007</b><br>Grey aluminium | <b>RAL9016</b><br>Traffic white | <b>RAL8019</b><br>Grey brown |
| Ingress protection | IP66                           |                                  |                                 |                              |
| Impact resistance  | IK07                           |                                  |                                 |                              |

**Electrical description**

|                   |   |
|-------------------|---|
| Power supply      | Integral [ECG] electronic driver 120V-277V. DMX enabled driver. |
| Driver / Ballast  | 120-277V DMX  |
| Surge protection  | 1/2 kV (optional SP10)  |
| Energy efficiency | E (Light source)  |

**Additional information**

|                   |  |
|-------------------|--|
| Diameter (inches) | 7.48   |
| Listings          | Contact WE-EF USA for ETL/UL certification status. |
| Windage           | 0.503  |
| Lifetime          | Ta=25°/40° L70B50 > 50000h                         |

**Options**

**Light distribution**    **Color temperature**    **Nominal Watt**




[FP]

2200-6000K

18 W

### Configurations

| Light distribution  | Part ID  | Light source         | Delivered lumens | Rated input power | CRI |
|---|----------|----------------------|------------------|-------------------|-----|
|  | 139-2332 | LED-1/18W/2200-6000K | 441 lm           | 18 W              | 80  |
|   | 139-2332 | LED-1/18W/2200-6000K | 686.9 lm         | 18 W              | 80  |

[FP]