






Description

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately. Tunable White Technology.

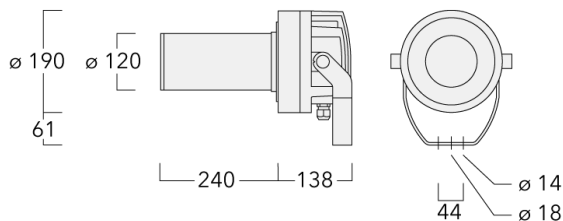

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

Gobo outside diameter 66 mm, max. printable area d = 48 mm. WE-EF recommendation = d 38 mm.

Specifications

Material description

Colours	RAL9004	RAL9006	RAL9007	RAL7016
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	RAL9016			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Surge protection	1/2 kV (optional SP10)
------------------	------------------------

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution

Colour temperature

Nominal Watt




[GP] symmetric Gobo-Projector

2200-6000K

18 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2331	LED-1/18W/2200-6000K	268.9 lm	18 W	80
	139-2331	LED-1/18W/2200-6000K	457.1 lm	18 W	80

[GP] symmetric Gobo-Projector