






**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately. Tunable White Technology.

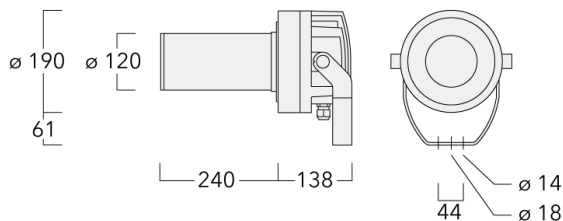

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

Gobo outside diameter 66 mm, max. printable area d = 48 mm. WE-EF recommendation = d 38 mm.

## Specifications

### Material description

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

### Electrical description

Power supply	230V / 50 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

### Additional information

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[GP] symmetric Gobo-Projector

2200-6000K

18 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-2331	LED-1/18W/2200-6000K	268.9 lm	18 W	80
	139-2331	LED-1/18W/2200-6000K	457.1 lm	18 W	80

[GP] symmetric Gobo-Projector