






**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical and aspherical, double flat convex lens system. Gobo motif on request, to be ordered separately. Tunable White Technology.

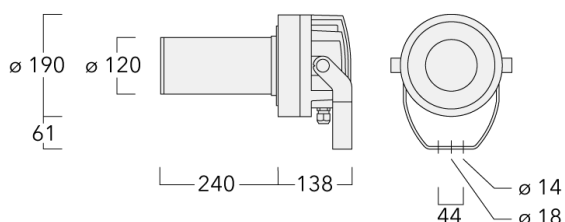

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

Gobo outside diameter 66 mm, max. printable area d = 48 mm. WE-EF recommendation = d 38 mm.

## Specifications

### Material description

|                    |                |                 |                |                 |
|--------------------|----------------|-----------------|----------------|-----------------|
| Colours            | <b>RAL9004</b> | <b>RAL9006</b>  | <b>RAL9007</b> | <b>RAL7016</b>  |
|                    | Signal black   | White aluminium | Grey aluminium | Anthracite grey |
|                    | <b>RAL9016</b> |                 |                |                 |
|                    | Traffic white  |                 |                |                 |
| Ingress protection | IP66           |                 |                |                 |
| Impact resistance  | IK07           |                 |                |                 |

### Electrical description

|                  |                        |
|------------------|------------------------|
| Surge protection | 1/2 kV (optional SP10) |
|------------------|------------------------|

### Additional information

|          |                        |
|----------|------------------------|
| Lifetime | Ta=25° L70B50 > 50000h |
|----------|------------------------|

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[GP] symmetric Gobo-Projector

2200-6000K

18 W

### Configurations

| Light distribution  | Part ID  | Light source         | Rated lumens | Rated input power | CRI |
|---|----------|----------------------|--------------|-------------------|-----|
|  | 139-2331 | LED-1/18W/2200-6000K | 268.9 lm     | 18 W              | 80  |
|   | 139-2331 | LED-1/18W/2200-6000K | 457.1 lm     | 18 W              | 80  |

[GP] symmetric Gobo-Projector