




**Description**

Profile Projector [ZP] for zoom spot. Spherical and aspherical, double flat convex lens system. Tunable White Technology.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

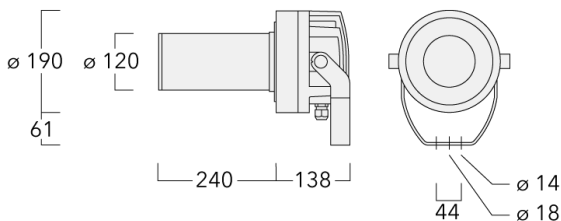

## Specifications

### Material description

Colours	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	<b>RAL7016</b>
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	<b>RAL9016</b>			
	Traffic white			
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	E (Light source)

### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[ZP] symmetric Zoom-Projector

2200-6000K

18 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-2330	LED-1/18W/2200-6000K	441 lm	18 W	80
	139-2330	LED-1/18W/2200-6000K	686.9 lm	18 W	80