






Description

Tunable White.

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland, second gland for through wiring on request. CAD-optimized optics for superior illumination and glare control. Integral driver, thermally separated. OLC® One LED Concept. Factory-installed LED circuit board. Tunable White technology. DMX interface.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

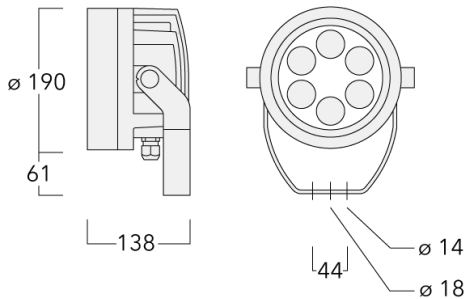

Specifications

Material description

Colors	RAL9004 Signal black	RAL9007 Grey aluminium	RAL9016 Traffic white	RAL8019 Grey brown
Ingress protection	IP66			
Impact resistance	IK07			




Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. DMX enabled driver.
Driver / Ballast	120-277V DMX
Surge protection	Integral 10kV Surge Protector
Energy efficiency	E (Lichtquelle)




Additional information

Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.
Windage	0.372
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 [W] bi-symmetric, wide beam	2200-6000K	22 W
 [N] bi-symmetric, narrow beam		
 [M] symmetric, medium beam		

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[M] symmetric, medium beam</p>	139-2042_us	LED-6/22W/2200-6000K	2027.4 lm	22 W	80
 <p>[N] bi-symmetric, narrow beam</p>	139-2043_us	LED-6/22W/2200-6000K	2080.3 lm	22 W	80
 <p>[W] bi-symmetric, wide beam</p>	139-2041_us	LED-6/22W/2200-6000K	2043.5 lm	22 W	80