


Description

Colour Changer Profile Projector [ZP] for zoom spot. Spherical/triple flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass main lens. Two cable glands for improved wiring flexibility. Integral EC electronic converter with DMX Interface, thermally separated. PMMA LED lenses. Factory installed RGBW/ RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colours. DMX interface.

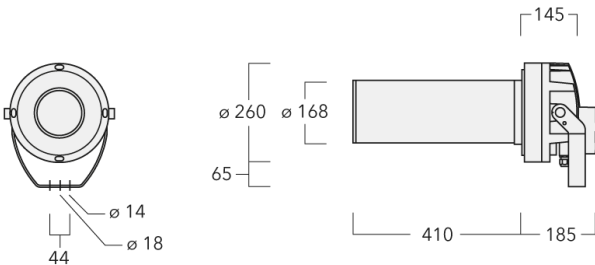

Specifications

Material description

Colours	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="background-color: black; color: white; padding: 5px 10px; border: 1px solid black;">RAL9004</div> <div style="background-color: #cccccc; padding: 5px 10px; border: 1px solid black;">RAL9006</div> <div style="background-color: #999999; padding: 5px 10px; border: 1px solid black;">RAL9007</div> </div> <div style="display: flex; justify-content: space-around; margin-top: 5px;"> Signal black White aluminium Grey aluminium </div>
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution

Colour temperature

Nominal Watt



[ZP] symmetric Zoom-Projector


3000K+RGBW

44 W

4000K+RGBW

RGBA

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP] symmetric Zoom-Projector</p>	139-3019	LED-1/44W/3000K+RGBW	1029.8 lm	44 W	80
	139-3019	LED-1/44W/3000K+RGBW	1029 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029.8 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029 lm	44 W	80
	139-3021	LED-1/44W/RGBA	908.7 lm	44 W	80
	139-3021	LED-1/44W/RGBA	907.9 lm	44 W	80