


**Description**

RGBW/RGBA Colour Changer Profile Projector [ZP] for zoom spot. Spherical/triple flat convex lens system.

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. Integral EC electronic converter, thermally separated. PMMA LED lens array. Factory-installed RGBW/RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/ colours. DMX interface. For the M20 cable gland for network- and DMX-connection, WE-EF recommends a multi-core cable for DMX and power, "Power PUR-SR 3x1,5 + DMX".

Configuration with 3 lenses 20°-38°. Extension of the beam angle to 4 lenses 39°-47° on request, to be specified at time of ordering.

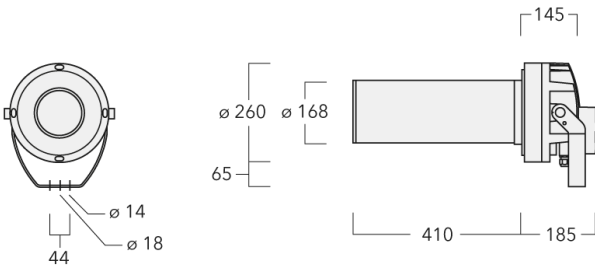

## Specifications

### Material description

Colours	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9016</b>	<b>RAL7016</b>
	Signal black	White aluminium	Traffic white	Anthracite grey
	<b>RAL9007</b>			
	Grey aluminium			
	Ingress protection	IP66		
Impact resistance	IK07			


### Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)


### Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

**Options**

Light distribution	Colour temperature	Nominal Watt
 [ZP]	3000K+RGBW	44 W
	4000K+RGBW	
	RGBA	

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [ZP]	139-3019	LED-1/44W/3000K+RGBW	1029.8 lm	44 W	80
	139-3019	LED-1/44W/3000K+RGBW	1029 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029.8 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029 lm	44 W	80
	139-3021	LED-1/44W/RGBA	908.7 lm	44 W	80
	139-3021	LED-1/44W/RGBA	907.9 lm	44 W	80