




Description

RGBW/RGBA Colour Changer Profile Projector [ZP] for zoom spot. Spherical/triple flat convex lens system. RGBW and RGBA.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands.

Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. LED circuit board with WE-EF Colour Boost Technology.

DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

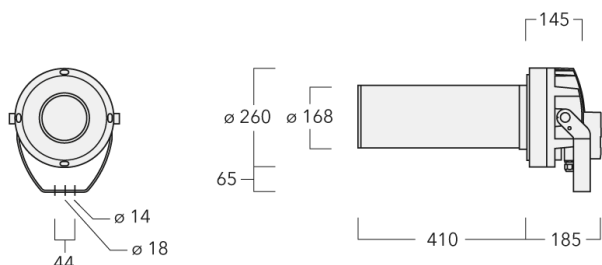

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Ingress protection	IP66			
Impact resistance	IK07			


Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)


Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options

Light distribution	Colour temperature	Nominal Watt
 [ZP]	3000K+RGBW	44 W
	4000K+RGBW	
	RGBA	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP]</p>	139-3019	LED-1/44W/3000K+RGBW	1029.8 lm	44 W	80
	139-3019	LED-1/44W/3000K+RGBW	1029 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029.8 lm	44 W	80
	139-3020	LED-1/44W/4000K+RGBW	1029 lm	44 W	80
	139-3021	LED-1/44W/RGBA	908.7 lm	44 W	80
	139-3021	LED-1/44W/RGBA	907.9 lm	44 W	80