


**Description**

RGBW/RGBA Colour Changer Profile Projector [FP] for framing applications, polygon shape. Spherical/triple flat convex lens system. RGBW and RGBA.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands.

Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. LED circuit board with WE-EF Colour Boost Technology.

DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

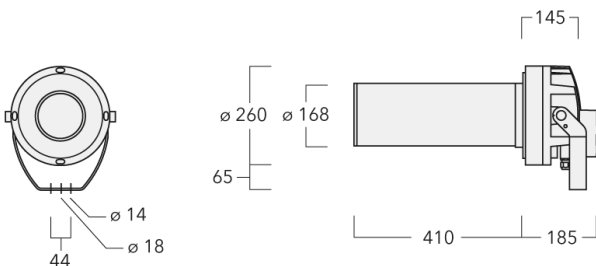

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL7016</b>	<b>RAL9007</b>
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket			
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options**

Light distribution	Colour temperature	Nominal Watt
--------------------	--------------------	--------------




3000K+RGBW

44 W

4000K+RGBW

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP]</p>	139-3007	LED-1/44W/3000K+RGBW	1029.8 lm	44 W	80
	139-3007	LED-1/44W/3000K+RGBW	1029 lm	44 W	80
	139-3008	LED-1/44W/4000K+RGBW	1029.8 lm	44 W	80
	139-3008	LED-1/44W/4000K+RGBW	1029 lm	44 W	80
	139-3009	LED-1/44W/RGBA	908.7 lm	44 W	80
	139-3009	LED-1/44W/RGBA	907.9 lm	44 W	80