






Description

Colour Changer Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif (size B - 86mm OD, 64mm Printable Area) on request, to be ordered separately.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass main lens. Two cable glands for improved wiring flexibility. Integral EC electronic converter with DMX Interface, thermally separated. PMMA LED lenses. Factory-installed RGBW/ RGBA LED circuit board with WE-EF Colour Boost Technology. With Colour Boost the targeted and selective control of individual channels or colours means that a higher power of the LEDs can be accessed than in total when all colours are simultaneously operated. The light output is thus maximized by targeted control of individual channels/colours.

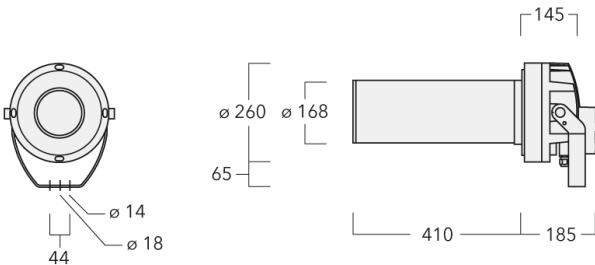

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)		
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	230V / 50 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	Gobo outside diameter 86 mm, max. printable area d = 64 mm. WE-EF recommendation = d 48 mm.

Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

Options

Light distribution

Colour temperature

Nominal Watt




[GP] symmetric Gobo-Projector

RGBW

44 W

RGBA

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP] symmetric Gobo-Projector</p>	139-2997	LED-1/44W/RGBA	536.7 lm	44 W	80
	139-2997	LED-1/44W/RGBA	717.7 lm	44 W	80
	139-2995	LED-1/44W/RGBW	608.2 lm	44 W	80
	139-2995	LED-1/44W/RGBW	813.4 lm	44 W	80
	139-2996	LED-1/44W/RGBW	608.2 lm	44 W	80
	139-2996	LED-1/44W/RGBW	813.4 lm	44 W	80