



**Description**


RGBW/RGBA Colour Changer Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif on request, to be ordered separately. RGBW and RGBA.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands.

Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. LED circuit board with WE-EF Colour Boost Technology.

DMX Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Custom-made gobos (outside diameter 86 mm, max. printable area  $d = 60$  mm. WE-EF recommendation  $d = 48$  mm) available on request.

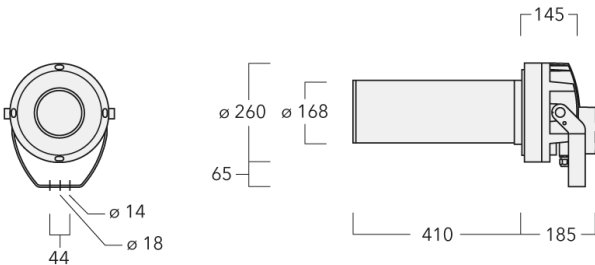

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL7016</b>	<b>RAL9007</b>
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Ingress protection	IP66			
Impact resistance	IK07			

### Electrical description

Surge protection	1/2 kV (optional SP10)
Energy efficiency	G (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**



[GP] symmetric Gobo-Projector


3000K+RGBW

44 W

4000K+RGBW

RGBA

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [GP] symmetric Gobo-Projector	139-2995	LED-1/44W/3000K+RGBW	608.2 lm	44 W	80
	139-2995	LED-1/44W/3000K+RGBW	813.4 lm	44 W	80
	139-2996	LED-1/44W/4000K+RGBW	608.2 lm	44 W	80
	139-2996	LED-1/44W/4000K+RGBW	813.4 lm	44 W	80
	139-2997	LED-1/44W/RGBA	536.7 lm	44 W	80
	139-2997	LED-1/44W/RGBA	717.7 lm	44 W	80