






Description

Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif on request, to be ordered separately.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands. Second gland for through wiring.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. Optional 2200 K version is available on request.

Custom-made gobos (outside diameter 86 mm, max. printable area d = 60 mm. WE-EF recommendation d = 48 mm) available on request.

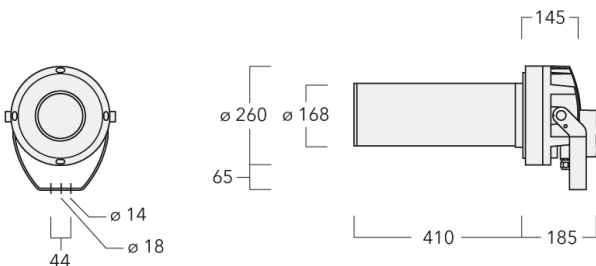

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	RAL9004 Signal black	RAL9016 Traffic white	RAL7016 Anthracite grey	RAL9007 Grey aluminium
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10)
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options

Light distribution



[GP] symmetric Gobo-Projector

Colour temperature

Nominal Watt



2700K

36 W

48 W




3000K



4000K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP] symmetric Gobo-Projector</p>	139-2989	LED-1/36W/2700K	2321.1 lm	36 W	80
	139-2989	LED-1/36W/2700K	2126.6 lm	36 W	80
	139-2991	LED-1/36W/3000K	2341.8 lm	36 W	80
	139-2991	LED-1/36W/3000K	2145.5 lm	36 W	80
	139-2993	LED-1/36W/4000K	2509.9 lm	36 W	80
	139-2993	LED-1/36W/4000K	2299.5 lm	36 W	80
	139-2990	LED-1/48W/2700K	2963.6 lm	48 W	80
	139-2990	LED-1/48W/2700K	2715.1 lm	48 W	80
	139-2992	LED-1/48W/3000K	2991.2 lm	48 W	80
	139-2992	LED-1/48W/3000K	2740.5 lm	48 W	80
	139-2994	LED-1/48W/4000K	3205.3 lm	48 W	80
	139-2994	LED-1/48W/4000K	2936.7 lm	48 W	80