






Description

Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif (size B - 86mm OD, 64mm Printable Area) on request, to be ordered separately.

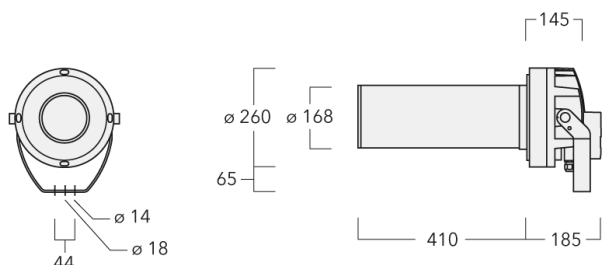

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass main lens. Two cable glands for improved wiring flexibility. Integral EC electronic converter, thermally separated. LED boards can be removed for upgrading. PMMA LED lenses. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

Specifications

Material description

Colours	RAL9004 Signal black	RAL9006 White aluminium	RAL9007 Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)		
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10)
Energy efficiency	Gobo outside diameter 86 mm, max. printable area d = 64 mm. WE-EF recommendation = d 48 mm.





Additional information

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------


Options

Light distribution **Colour temperature** **Nominal Watt**



	2200K	36 W
	2700K	48 W
	3000K	
	4000K	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP]</p>	139-2987	LED-1/36W/2200K	1980.3 lm	36 W	80
	139-2987	LED-1/36W/2200K	1814.3 lm	36 W	80
	139-2989	LED-1/36W/2700K	2321.1 lm	36 W	80
	139-2989	LED-1/36W/2700K	2126.6 lm	36 W	80
	139-2991	LED-1/36W/3000K	2341.8 lm	36 W	80
	139-2991	LED-1/36W/3000K	2145.5 lm	36 W	80
	139-2993	LED-1/36W/4000K	2509.9 lm	36 W	80
	139-2993	LED-1/36W/4000K	2299.5 lm	36 W	80
	139-2988	LED-1/48W/2200K	2528.3 lm	48 W	80
	139-2988	LED-1/48W/2200K	2316.4 lm	48 W	80
	139-2990	LED-1/48W/2700K	2963.6 lm	48 W	80
	139-2990	LED-1/48W/2700K	2715.1 lm	48 W	80
	139-2992	LED-1/48W/3000K	2991.2 lm	48 W	80
	139-2992	LED-1/48W/3000K	2740.5 lm	48 W	80
	139-2994	LED-1/48W/4000K	3205.3 lm	48 W	80
	139-2994	LED-1/48W/4000K	2936.7 lm	48 W	80