




Description

Profile Projector [ZP] for zoom spot. Spherical/triple flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands. Second gland for through wiring.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. Optional 2200 K version is available on request.

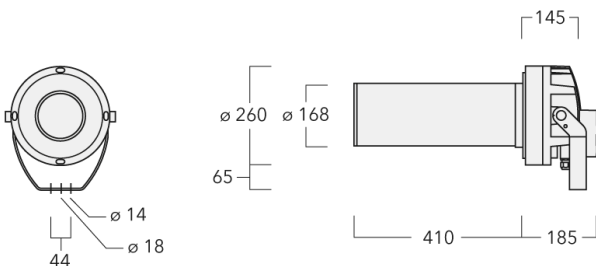

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Ingress protection	IP66			
Impact resistance	IK07			

Electrical description

Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Surge protection	6/6 kV (optional SP10)

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Options

Light distribution **Colour temperature** **Nominal Watt**




2700K

36 W

48 W




3000K



4000K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[ZP]</p>	139-3013	LED-1/36W/2700K	2886 lm	36 W	80
	139-3013	LED-1/36W/2700K	2580.2 lm	36 W	80
	139-3015	LED-1/36W/3000K	2911.7 lm	36 W	80
	139-3015	LED-1/36W/3000K	2603.2 lm	36 W	80
	139-3017	LED-1/36W/4000K	3120.7 lm	36 W	80
	139-3017	LED-1/36W/4000K	2790.1 lm	36 W	80
	139-3014	LED-1/48W/2700K	3684.7 lm	48 W	80
	139-3014	LED-1/48W/2700K	3294.3 lm	48 W	80
	139-3016	LED-1/48W/3000K	3719.1 lm	48 W	80
	139-3016	LED-1/48W/3000K	3325 lm	48 W	80
	139-3018	LED-1/48W/4000K	3985.4 lm	48 W	80
	139-3018	LED-1/48W/4000K	3563.1 lm	48 W	80