


Description

Profile Projector [FP] for framing applications, polygon shape. Spherical/triple flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands. Second gland for through wiring.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. Optional 2200 K version is available on request.

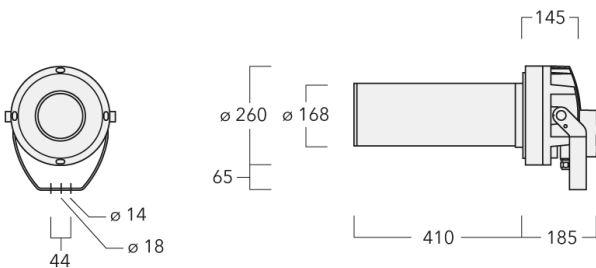

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	RAL9004	RAL9016	RAL7016	RAL9007
	Signal black	Traffic white	Anthracite grey	Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment
Energy efficiency	C-D (Light source)

Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Options

Light distribution



[FP] symmetric Framing-Projector

Colour temperature

Nominal Watt



2700K

36 W

48 W




3000K



4000K

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP] symmetric Framing-Projector</p>	139-3001	LED-1/36W/2700K	2886 lm	36 W	80
	139-3001	LED-1/36W/2700K	2580.2 lm	36 W	80
	139-3003	LED-1/36W/3000K	2911.7 lm	36 W	80
	139-3003	LED-1/36W/3000K	2603.2 lm	36 W	80
	139-3005	LED-1/36W/4000K	3120.7 lm	36 W	80
	139-3005	LED-1/36W/4000K	2790.1 lm	36 W	80
	139-3002	LED-1/48W/2700K	3684.7 lm	48 W	80
	139-3002	LED-1/48W/2700K	3294.3 lm	48 W	80
	139-3004	LED-1/48W/3000K	3719.1 lm	48 W	80
	139-3004	LED-1/48W/3000K	3325 lm	48 W	80
	139-3006	LED-1/48W/4000K	3985.4 lm	48 W	80
	139-3006	LED-1/48W/4000K	3563.1 lm	48 W	80