






Description

Profile Projector [FP] for framing applications, polygon shape. Spherical/triple flat convex lens system.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable glands for improved wiring flexibility. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

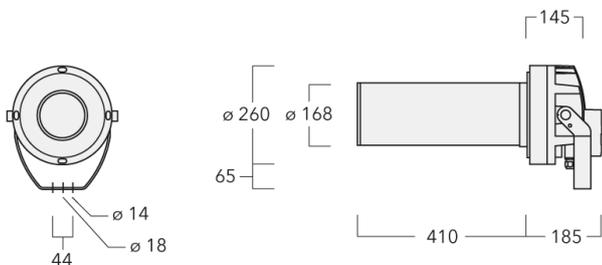

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy		
Lens	Safety glass lens		
Colours	RAL9004	RAL9006	RAL9007
	Signal black	White aluminium	Grey aluminium
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)		
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Additional information

Lifetime	Ta=40° L70B50 > 50000h
----------	------------------------


Options

Light distribution **Colour temperature** **Nominal Watt**



	2200K	36 W 48 W
	3000K	
	4000K	
	2700K	

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[FP]</p>	139-2999	LED-1/36W/2200K	2462.2 lm	36 W	80
	139-2999	LED-1/36W/2200K	2201.3 lm	36 W	80
	139-3003	LED-1/36W/3000K	2911.7 lm	36 W	80
	139-3003	LED-1/36W/3000K	2603.2 lm	36 W	80
	139-3005	LED-1/36W/4000K	3120.7 lm	36 W	80
	139-3005	LED-1/36W/4000K	2790.1 lm	36 W	80
	139-3000	LED-1/48W/2200K	3143.6 lm	48 W	80
	139-3000	LED-1/48W/2200K	2810.5 lm	48 W	80
	139-3002	LED-1/48W/2700K	3684.7 lm	48 W	80
	139-3002	LED-1/48W/2700K	3294.3 lm	48 W	80
	139-3004	LED-1/48W/3000K	3719.1 lm	48 W	80
	139-3004	LED-1/48W/3000K	3325 lm	48 W	80
	139-3006	LED-1/48W/4000K	3985.4 lm	48 W	80
	139-3006	LED-1/48W/4000K	3563.1 lm	48 W	80