


**Description**

Profile Projector [FP] for framing applications, polygon shape. Spherical/triple flat convex lens system. Tunable White Technology.

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

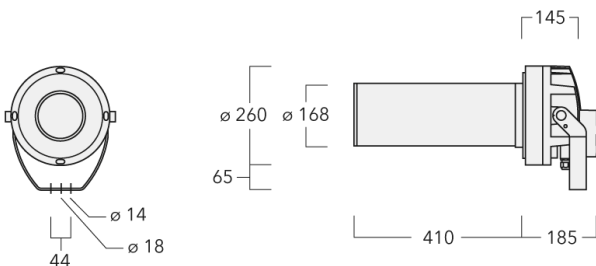

## Specifications

### Material description

---

Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Ingress protection	IP66		
Impact resistance	IK07		
Corrosion resistance	5CE+Primer		

---

### Electrical description

---

Power supply	220-240V / 50-60 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	E (Light source)

---

### Additional information

---

Lifetime	Ta=40° L90B10 > 90000h
----------	------------------------

---

**Options**

**Light distribution**

**Colour temperature**

**Nominal Watt**




[FP] symmetric Framing-Projector

2200-6000K

32 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	139-3010	LED-1/32W/2200-6000K	1516.9 lm	32 W	80
	139-3010	LED-1/32W/2200-6000K	1349.6 lm	32 W	80

[FP] symmetric Framing-Projector