






Description

Tunable white projector. Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif on request, to be ordered separately. IP66. Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Two cable glands.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. LED circuit board with Tunable White Technology.

DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Custom-made gobos (outside diameter 86 mm, max. printable area d = 60 mm. WE-EF recommendation d = 48 mm) available on request.

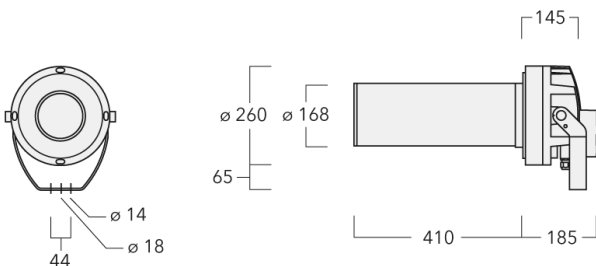

Specifications

Material description

| | | | | |
|--------------------|--------------------------------|----------------------------------|-----------------------------------|---------------------------------|
| Colours | RAL9004 Signal black | RAL9007 Grey aluminium | RAL7016 Anthracite grey | RAL9016 Traffic white |
| Ingress protection | IP66 | | | |
| Impact resistance | IK07 | | | |

Electrical description

| | |
|-------------------|------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Surge protection | 1/2 kV (optional SP10) |
| Energy efficiency | E (Light source) |

Additional information

| | |
|----------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
|----------|------------------------|

Options

Light distribution

Colour temperature

Nominal Watt




[GP] symmetric Gobo-Projector

2200-6000K

32 W

Configurations

| Light distribution | Part ID | Light source | Rated lumens | Rated input power | CRI |
|---|----------|----------------------|--------------|-------------------|-----|
|  | 139-2998 | LED-1/32W/2200-6000K | 808.4 lm | 32 W | 80 |
| | 139-2998 | LED-1/32W/2200-6000K | 952.2 lm | 32 W | 80 |

[GP] symmetric Gobo-Projector