






**Description**

Profile Projector [GP] for projection of gobos on a surface. Spherical/triple flat convex lens system. Gobo motif on request, to be ordered separately. Tunable White Technology.

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. One cable gland. Second gland for through wiring on request. PMMA LED lens array. Factory installed LED circuit board. LED board can be removed for upgrading. Integral EC electronic converter, thermally separated. DALI interface.

Gobo outside diameter 86 mm, max. printable area d = 60 mm.

Configuration with 3 lenses 18°-36°. Extension of the beam angle to 4 lenses 34°-42° on request, to be specified at time of ordering.

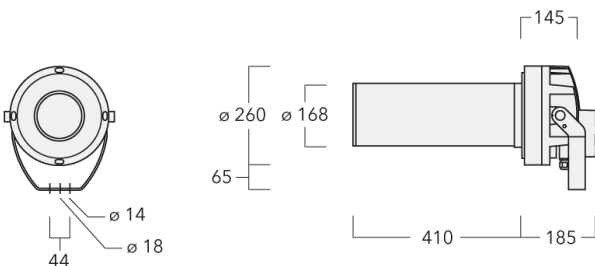

## Specifications

### Material description

Colours	<b>RAL9004</b>	<b>RAL9006</b>	<b>RAL9007</b>	<b>RAL7016</b>
	Signal black	White aluminium	Grey aluminium	Anthracite grey
	<b>RAL9016</b>			
	Traffic white			
	Ingress protection	IP66		
Impact resistance	IK07			

### Electrical description

Power supply	220-240V / 50-60 Hz
Surge protection	1/2 kV (optional SP10)
Energy efficiency	E (Light source)

### Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

**Options**

**Light distribution**    **Colour temperature**    **Nominal Watt**




[GP]

2200-6000K

32 W

### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[GP]</p>	139-2998	LED-1/32W/2200-6000K	808.4 lm	32 W	80
	139-2998	LED-1/32W/2200-6000K	952.2 lm	32 W	80