MRY224-TW LED - 600 mm

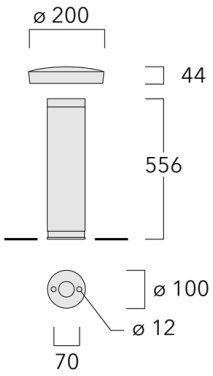

Description

Tunable white. IP66. Class I. IK10. Marine-grade, all-aluminium construction. Pole section features anodised aluminium core. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate main lens, UV-stabilised. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. LED circuit board with Tunable White Technology. DALI Interface. For other control interface options to suit specific project requirements, contact WE-EF.

Specifications

Material description

Colours	RAL9004	RAL9007	RAL9006
	Signal black	Grey aluminium	White aluminium
Ingress protection	IP66		
Impact resistance	IK10		
Corrosion resistance	5CE+Primer		

Electrical description

Driver / Ballast	Integral EC electronic converter, DALI
Surge protection	10/10kV
Energy efficiency	F (Light source)

Additional information

Options

Light distribution	Colour temperature	Nominal Watt
[C70] symmetric	2700-5000K	10 W
[S60] asymmetric, side throw		

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - https://we-ef.com/aus

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[C70] symmetric	115-9810	LED-1/10W/2700-5000K	699.9 lm	10 W	80
[S60] asymmetric, side throw	115-9813	LED-1/10W/2700-5000K	567.2 lm	10 W	80

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - https://we-ef.com/aus