






**Description**

IP65. Surface mounted wallwasher. Suitable for installation over 4" recessed junction box in uplight or downlight position. Optional 2200 K version available. To be specified at time of ordering.

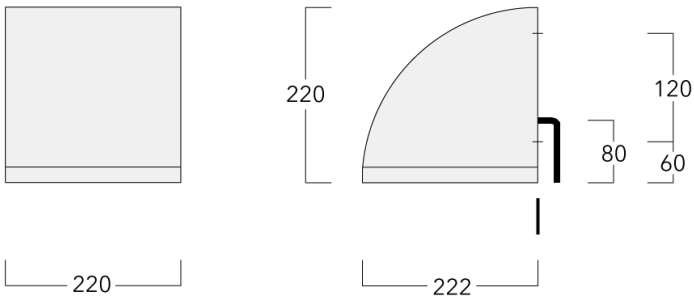

## Specifications

### Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Tempered glass lens.			
Colors	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL8019</b>	<b>RAL9007</b>
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP65			
Impact resistance	IK07			
Corrosion resistance	5CE			

### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)

### Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

**Options**

**Light distribution**



[M] symmetric, medium beam



[VNS] symmetric, very narrow beam, sharp cut-off

**Color temperature**


**Nominal Watt**



3000K

12 W

18 W





4000K



2700K

## Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M] symmetric, medium beam	132-0633_us	LED-12/12W/2700K	1499.3 lm	12 W	80
	132-0522_us	LED-12/12W/3000K	1602.7 lm	12 W	80
	132-0523_us	LED-12/12W/4000K	1757.8 lm	12 W	80
	132-0634_us	LED-12/18W/2700K	2068 lm	18 W	80
	132-0532_us	LED-12/18W/3000K	2223.1 lm	18 W	80
	132-0533_us	LED-12/18W/4000K	2378.2 lm	18 W	80
 [VNS] symmetric, very narrow beam, sharp cut-off	132-0635_us	LED-12/12W/2700K	1539 lm	12 W	80
	132-0524_us	LED-12/12W/3000K	1645.1 lm	12 W	80
	132-0525_us	LED-12/12W/4000K	1804.3 lm	12 W	80
	132-0636_us	LED-12/18W/2700K	2122.7 lm	18 W	80
	132-0534_us	LED-12/18W/3000K	2281.9 lm	18 W	80
	132-0535_us	LED-12/18W/4000K	2441.1 lm	18 W	80