


Description

IP65. Surface mounted wallwasher. Suitable for installation over 4" recessed junction box in uplight or downlight position. Optional 2200 K version available. To be specified at time of ordering.

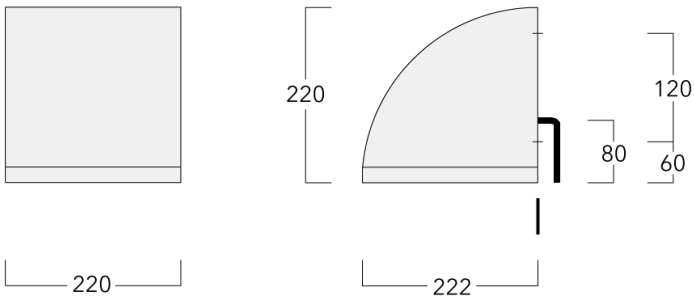

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Tempered glass lens.			
Colors	RAL9004	RAL9016	RAL8019	RAL9007
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP65			
Impact resistance	IK07			
Corrosion resistance	5CE			






Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)



Additional information

Height x Depth (inches)	8.66 x 8.66
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 [M]	 3000K	12 W 18 W
 [EES]	 4000K	
	 2700K	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [EES]	132-0635	LED-12/12W/2700K	1539 lm	12 W	80
	132-0524	LED-12/12W/3000K	1645.1 lm	12 W	80
	132-0525	LED-12/12W/4000K	1804.3 lm	12 W	80
	132-0636	LED-12/18W/2700K	2122.7 lm	18 W	80
	132-0534	LED-12/18W/3000K	2281.9 lm	18 W	80
	132-0535	LED-12/18W/4000K	2441.1 lm	18 W	80
 [M]	132-0633	LED-12/12W/2700K	1499.3 lm	12 W	80
	132-0522	LED-12/12W/3000K	1602.7 lm	12 W	80
	132-0523	LED-12/12W/4000K	1757.8 lm	12 W	80
	132-0634	LED-12/18W/2700K	2068 lm	18 W	80
	132-0532	LED-12/18W/3000K	2223.1 lm	18 W	80
	132-0533	LED-12/18W/4000K	2378.2 lm	18 W	80