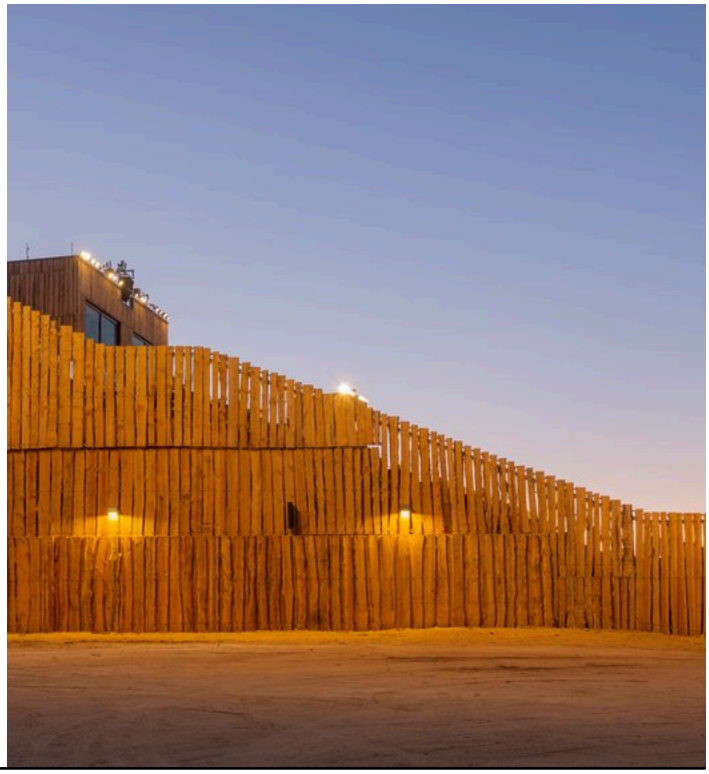

Surface-Mounted Wall Luminaires

OLV334 LED

IP66. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Powdercoat finish in black RAL 9004, grey aluminium RAL 9007 or white RAL 9016. Safety glass lens. Silicone CCG® Controlled Compression Gasket.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC ® One LED Concept. Two cable entries.

Luminaire can be mounted for up or down lighting.

IK10 on request with polycarbonate lens. Optional 2200 K version available. To be specified at time of ordering.

Asymmetric	12 – 24 W	1242 – 2951 lm	IP65 / IK08
Variant	Wattage	Rated lumens	IP / IK

Lighting

Light distribution

[S70] asymmetric, side throw

[R65] rectangular, side throw

[A60] asymmetric, forward throw

[S65] asymmetric, side throw

[S60] asymmetric, side throw

Colour temperature

2700K

3000K

4000K

Wattage

12 W

24 W

Physical description

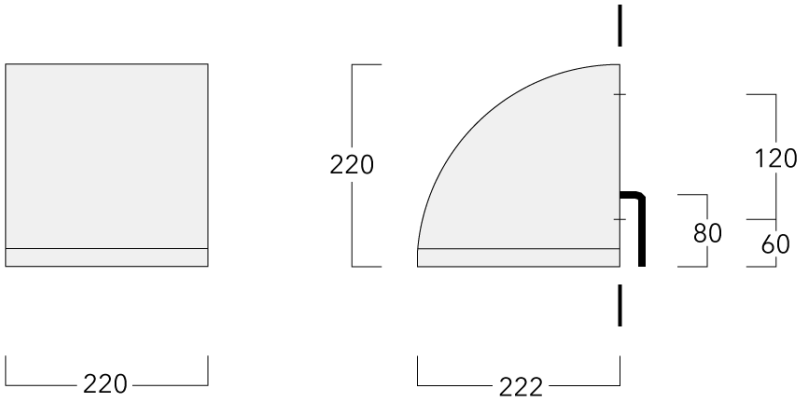

Height	220 mm
Depth	220 mm
Weight	6.6 kg
Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	**RAL9004** Signal black; **RAL9006** White aluminium; **RAL9007** Grey aluminium
Finish	Powdercoat finish in black RAL9004, grey aluminium RAL9007 or white aluminium RAL9006
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP65
Impact resistance	IK08
Corrosion resistance	5CE+Primer

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Cable	Two cable entries
Surge protection	1/2 kV (optional SP10)
Energy efficiency	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

Additional information

Lifetime	Ta=40° L90B10 > 90000h

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
[A60] asymmetric, forward throw	132-8369	LED-6/12W/3000K	1315.3 lm	14.5 W	80
	132-8368	LED-6/12W/4000K	1406 lm	14.5 W	80
	132-0641	LED-12/12W/2700K	1381 lm	13.9 W	80
	132-0530	LED-12/12W/3000K	1476.3 lm	13.9 W	80
	132-0531	LED-12/12W/4000K	1619.1 lm	13.9 W	80
	132-0642	LED-12/24W/2700K	2449.2 lm	27 W	80
	132-0540	LED-12/24W/3000K	2630.6 lm	27 W	80
	132-0541	LED-12/24W/4000K	2812 lm	27 W	80
[R65] rectangular, side throw	132-8361	LED-6/12W/3000K	1242.3 lm	14.5 W	80
	132-8360	LED-6/12W/4000K	1328 lm	14.5 W	80
	132-0528	LED-12/12W/3000K	1394.4 lm	13.9 W	80
	132-0529	LED-12/12W/4000K	1529.4 lm	13.9 W	80
	132-0640	LED-12/24W/2700K	2313.3 lm	27 W	80
	132-0538	LED-12/24W/3000K	2484.7 lm	27 W	80
	132-0539	LED-12/24W/4000K	2656.1 lm	27 W	80
[S60] asymmetric, side throw	132-8365	LED-6/12W/3000K	1332.7 lm	14.5 W	80
	132-8364	LED-6/12W/4000K	1424.6 lm	14.5 W	80
[S65] asymmetric, side throw	132-8363	LED-6/12W/3000K	1290.3 lm	14.5 W	80
	132-8362	LED-6/12W/4000K	1379.3 lm	14.5 W	80
[S70] asymmetric, side throw	132-8367	LED-6/12W/3000K	1380.3 lm	14.5 W	80
	132-8366	LED-6/12W/4000K	1475.5 lm	14.5 W	80
	132-0637	LED-12/12W/2700K	1449.3 lm	13.9 W	80
	132-0526	LED-12/12W/3000K	1549.2 lm	13.9 W	80
	132-0527	LED-12/12W/4000K	1699.2 lm	13.9 W	80
	132-0638	LED-12/24W/2700K	2570.2 lm	27 W	80
	132-0536	LED-12/24W/3000K	2760.6 lm	27 W	80
	132-0537	LED-12/24W/4000K	2951 lm	27 W	80

Surface-Mounted Wall Luminaires

OLV334 LED

we-ef

A Fagerhult Group Company

WE-EF LIGHTING Pty Ltd
47 Tarnard Drive, 3195 Braeside, Victoria
Phone: +61 3 8587 0444
Fax: +61 3 8587 0499
info.australia@we-ef.com
https://we-ef.com/aus

Information and specifications subject to change without notice.