




220

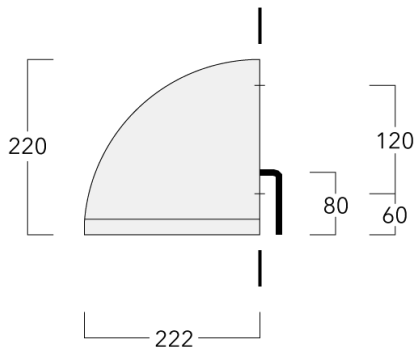

Description

IP65. IK08; IK10 on request with polycarbonate lens. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output.

Luminaire can be mounted for up or down lighting.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Tempered glass lens.			
Colors	RAL9004	RAL9016	RAL8019	RAL9007
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP65			
Impact resistance	IK07			
Corrosion resistance	5CE			







Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)




Additional information

Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

Options

Light distribution	Color temperature	Nominal Watt
 [S70] Type II Short	 3000K	12 W 24 W
 [R65] Type IV Medium	 4000K	
 [A60] Type IV Very Short	 2700K	

Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	132-0641_us	LED-12/12W/2700K	1381 lm	12 W	80
	132-0530_us	LED-12/12W/3000K	1476.3 lm	12 W	80
	132-0531_us	LED-12/12W/4000K	1619.1 lm	12 W	80
	132-0642_us	LED-12/24W/2700K	2449.2 lm	24 W	80
	132-0540_us	LED-12/24W/3000K	2630.6 lm	24 W	80
	132-0541_us	LED-12/24W/4000K	2812 lm	24 W	80
 <p>[R65] Type IV Medium</p>	132-0639_us	LED-12/12W/2700K	1304.5 lm	12 W	80
	132-0528_us	LED-12/12W/3000K	1394.4 lm	12 W	80
	132-0529_us	LED-12/12W/4000K	1529.4 lm	12 W	80
	132-0640_us	LED-12/24W/2700K	2313.3 lm	24 W	80
	132-0538_us	LED-12/24W/3000K	2484.7 lm	24 W	80
	132-0539_us	LED-12/24W/4000K	2656.1 lm	24 W	80
 <p>[S70] Type II Short</p>	132-0637_us	LED-12/12W/2700K	1449.3 lm	12 W	80
	132-0526_us	LED-12/12W/3000K	1549.2 lm	12 W	80
	132-0527_us	LED-12/12W/4000K	1699.2 lm	12 W	80
	132-0638_us	LED-12/24W/2700K	2570.2 lm	24 W	80
	132-0536_us	LED-12/24W/3000K	2760.6 lm	24 W	80
	132-0537_us	LED-12/24W/4000K	2951 lm	24 W	80