




220

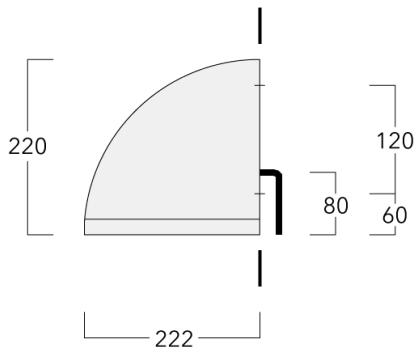

**Description**

IP65. IK08; IK10 on request with polycarbonate lens. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver. OLC® One LED Concept. Advanced thermal management protects LEDs while optimizing lumens output.

Luminaire can be mounted for up or down lighting.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

## Specifications

### Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Tempered glass lens.			
Colors	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL8019</b>	<b>RAL9007</b>
	Signal black	Traffic white	Grey brown	Grey aluminium
Gasket	Silicone rubber gasket			
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP65			
Impact resistance	IK07			
Corrosion resistance	5CE			






### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Standard. Optional DALI version available. To be specified at time of ordering.
Surge protection	1/2 kV (optional SP10)
Energy efficiency	C-D (Light source)




### Additional information

Height x Depth (inches)	8.66 x 8.66
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h

**Options**

Light distribution	Color temperature	Nominal Watt
 [S70] Type II Short	 3000K	12 W 24 W
 [R65]	 4000K	
 [A60] Type IV Very Short	 2700K	

**Configurations**

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 <p>[A60] Type IV Very Short</p>	132-0641	LED-12/12W/2700K	1381 lm	12 W	80
	132-0530	LED-12/12W/3000K	1476.3 lm	12 W	80
	132-0531	LED-12/12W/4000K	1619.1 lm	12 W	80
	132-0642	LED-12/24W/2700K	2449.2 lm	24 W	80
	132-0540	LED-12/24W/3000K	2630.6 lm	24 W	80
	132-0541	LED-12/24W/4000K	2812 lm	24 W	80
 <p>[R65]</p>	132-0639	LED-12/12W/2700K	1304.5 lm	12 W	80
	132-0528	LED-12/12W/3000K	1394.4 lm	12 W	80
	132-0529	LED-12/12W/4000K	1529.4 lm	12 W	80
	132-0640	LED-12/24W/2700K	2313.3 lm	24 W	80
	132-0538	LED-12/24W/3000K	2484.7 lm	24 W	80
	132-0539	LED-12/24W/4000K	2656.1 lm	24 W	80
 <p>[S70] Type II Short</p>	132-0637	LED-12/12W/2700K	1449.3 lm	12 W	80
	132-0526	LED-12/12W/3000K	1549.2 lm	12 W	80
	132-0527	LED-12/12W/4000K	1699.2 lm	12 W	80
	132-0638	LED-12/24W/2700K	2570.2 lm	24 W	80
	132-0536	LED-12/24W/3000K	2760.6 lm	24 W	80
	132-0537	LED-12/24W/4000K	2951 lm	24 W	80