

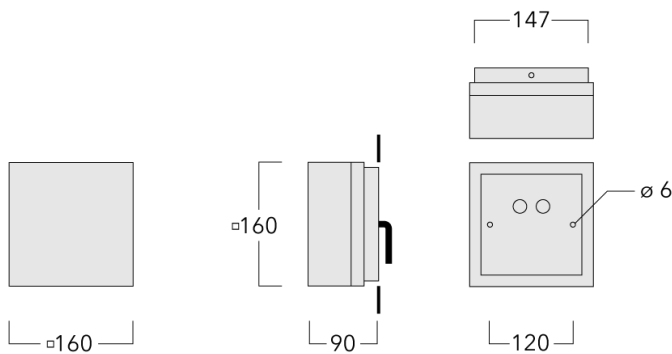




**Description**

IP66, Class I, IK07. Surface mounted LED wall luminaire. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral driver. CAD-optimized optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. 0-10V Dimming on request. Suitable for installation over 4" recessed junction box. Optional 2200 K version up to max. 1050mA available. To be specified at time of ordering.

ADA (American Disabilities Act) Compliant.



## Specifications

### Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.			
Lens	Clear tempered glass lens.			
Colors	<b>RAL9004</b>	<b>RAL9016</b>	<b>RAL8019</b>	<b>RAL9007</b>
	Signal black	Traffic white	Grey brown	Grey aluminium
Fasteners	PCS polymer coated stainless steel			
Ingress protection	IP66			
Impact resistance	IK07			
Corrosion resistance	5CE			
















### Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV
Energy efficiency	C-D (Light source)





### Additional information





Height x Depth (inches)	6.30 x 3.62
Listings	ETL listed. Suitable for wet locations.
Lifetime	Ta=25°/40° L90B10 > 90000h





**Options**

Light distribution	Color temperature	Nominal Watt
 [M]	 3000K	6 W
		12 W
 [M/M]	 4000K	9 W
		18 W
 [S]	 2700K	13 W
		26 W
 [M/S]		
 [E/S]		
 [E]		
 [E/E]		
 [R45]		
 [M/R45]		
 [E/R45]		
 [E/M]		
 [R45/R45]		

### Configurations

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [E]	131-9003	LED-3/6W/2700K	611.6 lm	6 W	80
	131-9420	LED-3/6W/3000K	656.9 lm	6 W	80
	131-9421	LED-3/6W/4000K	702.2 lm	6 W	80
	131-9009	LED-3/9W/2700K	928.7 lm	9 W	80
	131-0176	LED-3/9W/3000K	974 lm	9 W	80
	131-0177	LED-3/9W/4000K	1019.3 lm	9 W	80
	131-9014	LED-3/13W/2700K	1177.9 lm	13 W	80
	131-0182	LED-3/13W/3000K	1245.8 lm	13 W	80
	131-0183	LED-3/13W/4000K	1302.5 lm	13 W	80
	 [E/E]	131-9018	LED-3/12W/2700K	1223.6 lm	12 W
131-9416		LED-3/12W/3000K	1314.2 lm	12 W	80
131-9417		LED-3/12W/4000K	1404.8 lm	12 W	80
131-9026		LED-3/18W/2700K	1858 lm	18 W	80
131-9726		LED-3/18W/3000K	1948.6 lm	18 W	80
131-9731		LED-3/18W/4000K	2039.3 lm	18 W	80
131-9034		LED-3/26W/2700K	2356.5 lm	26 W	80
131-9736		LED-3/26W/3000K	2492.4 lm	26 W	80
131-9741		LED-3/26W/4000K	2605.7 lm	26 W	80
 [E/M]		131-9016	LED-3/12W/2700K	1157.9 lm	12 W
	131-9025	LED-3/18W/2700K	1758.3 lm	18 W	80
	131-9725	LED-3/18W/3000K	1844 lm	18 W	80
	131-9730	LED-3/18W/4000K	1929.8 lm	18 W	80
	131-9735	LED-3/26W/3000K	2358.7 lm	26 W	80
	131-9740	LED-3/26W/4000K	2465.9 lm	26 W	80
	 [E/R45]	131-9020	LED-3/12W/2700K	1163.2 lm	12 W
131-9462		LED-3/12W/3000K	1249.4 lm	12 W	80
131-9463		LED-3/12W/4000K	1335.5 lm	12 W	80
131-9023		LED-3/18W/2700K	1766.3 lm	18 W	80
131-9723		LED-3/18W/3000K	1852.5 lm	18 W	80
131-9728		LED-3/18W/4000K	1938.7 lm	18 W	80
131-9029		LED-3/26W/2700K	2240.2 lm	26 W	80
131-9733		LED-3/26W/3000K	2369.5 lm	26 W	80

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI	
 [E/S]	131-9738	LED-3/26W/4000K	2477.2 lm	26 W	80	
	131-7018	LED-3/12W/2700K	1127.3 lm	12 W	80	
	131-9408	LED-3/12W/3000K	1210.8 lm	12 W	80	
	131-9413	LED-3/12W/4000K	1294.3 lm	12 W	80	
	131-7021	LED-3/18W/2700K	1711.9 lm	18 W	80	
	131-7024	LED-3/26W/2700K	2171.1 lm	26 W	80	
 [M]	131-9002	LED-3/6W/2700K	546 lm	6 W	80	
	131-9401	LED-3/6W/3000K	586.5 lm	6 W	80	
	131-9404	LED-3/6W/4000K	626.9 lm	6 W	80	
	131-9008	LED-3/9W/2700K	829.1 lm	9 W	80	
	131-0174	LED-3/9W/3000K	869.6 lm	9 W	80	
	131-0175	LED-3/9W/4000K	910 lm	9 W	80	
	131-9013	LED-3/13W/2700K	1051.6 lm	13 W	80	
	131-0180	LED-3/13W/3000K	1112.2 lm	13 W	80	
	131-0181	LED-3/13W/4000K	1162.8 lm	13 W	80	
	 [M/M]	131-9015	LED-3/12W/2700K	1092.2 lm	12 W	80
131-9409		LED-3/12W/3000K	1173.1 lm	12 W	80	
131-9414		LED-3/12W/4000K	1254 lm	12 W	80	
131-9024		LED-3/18W/2700K	1658.5 lm	18 W	80	
131-9724		LED-3/18W/3000K	1739.5 lm	18 W	80	
131-9729		LED-3/18W/4000K	1820.4 lm	18 W	80	
131-9032		LED-3/26W/2700K	2103.5 lm	26 W	80	
131-9734		LED-3/26W/3000K	2224.9 lm	26 W	80	
131-9739		LED-3/26W/4000K	2326 lm	26 W	80	
 [M/R45]		131-9019	LED-3/12W/2700K	1097.5 lm	12 W	80
		131-9423	LED-3/12W/3000K	1178.8 lm	12 W	80
	131-9425	LED-3/12W/4000K	1260.1 lm	12 W	80	
	131-9022	LED-3/18W/2700K	1666.6 lm	18 W	80	
	131-9722	LED-3/18W/3000K	1747.9 lm	18 W	80	
	131-9727	LED-3/18W/4000K	1829.2 lm	18 W	80	
	131-9028	LED-3/26W/2700K	2113.8 lm	26 W	80	
	131-9732	LED-3/26W/3000K	2235.7 lm	26 W	80	
	131-9737	LED-3/26W/4000K	2337.3 lm	26 W	80	

Light distribution	Part ID	Light source	Delivered lumens	Rated input power	CRI
 [M/S]	131-7009	LED-3/12W/2700K	1061.7 lm	12 W	80
	131-9407	LED-3/12W/3000K	1140.3 lm	12 W	80
	131-9412	LED-3/12W/4000K	1218.9 lm	12 W	80
	131-7012	LED-3/18W/2700K	1612.2 lm	18 W	80
	131-7015	LED-3/26W/2700K	2044.7 lm	26 W	80
 [R45]	131-9004	LED-3/6W/2700K	551.4 lm	6 W	80
	131-9422	LED-3/6W/3000K	592.2 lm	6 W	80
	131-9424	LED-3/6W/4000K	633 lm	6 W	80
	131-9007	LED-3/9W/2700K	837.3 lm	9 W	80
	131-0178	LED-3/9W/3000K	878.1 lm	9 W	80
	131-0179	LED-3/9W/4000K	918.9 lm	9 W	80
	131-9012	LED-3/13W/2700K	1061.9 lm	13 W	80
	131-0184	LED-3/13W/3000K	1123.1 lm	13 W	80
	131-0185	LED-3/13W/4000K	1174.2 lm	13 W	80
	131-9021	LED-3/12W/2700K	2205.5 lm	12 W	80
 [R45/R45]	131-9027	LED-3/18W/2700K	3349.1 lm	18 W	80
	131-9035	LED-3/26W/2700K	4247.7 lm	26 W	80
	131-7000	LED-3/6W/2700K	515.6 lm	6 W	80
 [S]	131-9400	LED-3/6W/3000K	553.8 lm	6 W	80
	131-9403	LED-3/6W/4000K	592 lm	6 W	80
	131-7003	LED-3/9W/2700K	783 lm	9 W	80
	131-7006	LED-3/13W/2700K	993.1 lm	13 W	80