




**Description**

IP55, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls

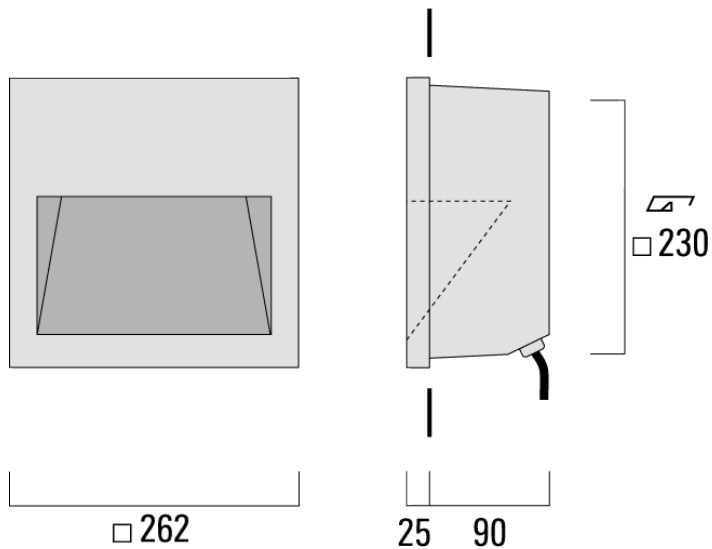

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy			
Lens	Safety glass lens			
Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9016</b> Traffic white	<b>RAL7016</b> Anthracite grey
	<b>RAL9007</b> Grey aluminium			
Gasket	Silicone rubber gasket			
Fasteners	PCS hardware			
Ingress protection	IP55			
Impact resistance	IK08			
Corrosion resistance	5CE			

### Electrical description

Power supply	Joint silicone
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

### Additional information

Lifetime	LED >60,000 h Ta 25°(B10/70) Control gear >50,000 h Ta 25°
----------	--

**Options**

**Light distribution**




[EC] asymmetric, forward throw

**Colour temperature**



3000K



4000K




2700K

**Nominal Watt**

12 W

## Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
	197-9091	LED-36/12W/2700K	473.6 lm	12 W	80
	197-9084	LED-36/12W/3000K	511.9 lm	12 W	80
	197-9086	LED-36/12W/4000K	531 lm	12 W	80

[EC] asymmetric, forward throw