




**Description**

IP66, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls.

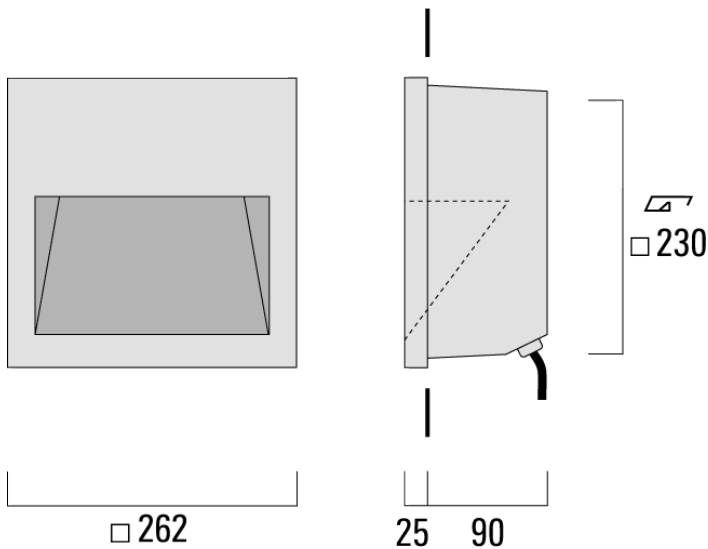

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy		
Lens	Safety glass lens		
Colours	<b>RAL9004</b> Signal black	<b>RAL9006</b> White aluminium	<b>RAL9007</b> Grey aluminium
Gasket	Silicone rubber gasket		
Fasteners	PCS hardware		
Ingress protection	IP55		
Impact resistance	IK08		
Corrosion resistance	5CE+Primer		

### Electrical description

Power supply	Joint silicone
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

### Additional information

Lifetime	LED >60,000 h Ta 25°(B10/70) Control gear >50,000 h Ta 25°
----------	--

**Options**

**Light distribution**



[EC] asymmetric, forward throw

**Colour temperature**


**Nominal Watt**



3000K

6 W

12 W




4000K



2700K

**Configurations**

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 <p>[EC] asymmetric, forward throw</p>	197-9090	LED-2/6W/2700K	376.9 lm	6 W	80
	197-9083	LED-2/6W/3000K	399.7 lm	6 W	80
	197-9085	LED-2/6W/4000K	422.6 lm	6 W	80
	197-9091	LED-36/12W/2700K	473.6 lm	12 W	80
	197-9084	LED-36/12W/3000K	511.9 lm	12 W	80
	197-9086	LED-36/12W/4000K	531 lm	12 W	80