




Description

IP55, Class I. IK08. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens. Two cable entries.

A pre-installation blockout is available and recommended for mounting in concrete walls

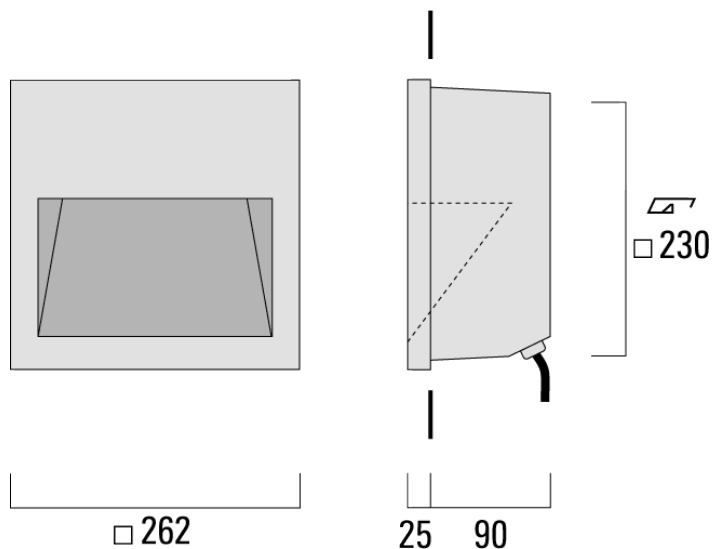

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy																
Lens	Safety glass lens																
Colours	<table><tr><td>RAL9004</td><td>RAL9006</td><td>RAL9016</td><td>RAL7016</td></tr><tr><td>Signal black</td><td>White aluminium</td><td>Traffic white</td><td>Anthracite grey</td></tr><tr><td>RAL9007</td><td></td><td></td><td></td></tr><tr><td>Grey aluminium</td><td></td><td></td><td></td></tr></table>	RAL9004	RAL9006	RAL9016	RAL7016	Signal black	White aluminium	Traffic white	Anthracite grey	RAL9007				Grey aluminium			
RAL9004	RAL9006	RAL9016	RAL7016														
Signal black	White aluminium	Traffic white	Anthracite grey														
RAL9007																	
Grey aluminium																	
Gasket	Silicone rubber gasket																
Fasteners	PCS hardware																
Ingress protection	IP55																
Impact resistance	IK08																
Corrosion resistance	5CE																

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Surge protection	1/2 kV

Additional information

Lifetime	LED >60,000 h Ta 25°(B10/70) Control gear >50,000 h Ta 25°
----------	--

Options

Light distribution




[EC] asymmetric, forward throw

Colour temperature



3000K



4000K




2700K

Nominal Watt

12 W

Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI
 [EC] asymmetric, forward throw	197-9091	LED-36/12W/2700K	473.6 lm	12 W	80
	197-9084	LED-36/12W/3000K	511.9 lm	12 W	80
	197-9086	LED-36/12W/4000K	531 lm	12 W	80